

Hello,

Below are links on cutting the mats.

<https://fujimats.com/blogs/resources/cutting-fuji-mats-for-a-column-or-pole-1>

Since you have one of our custom column pads, make sure this is already installed so the 1.5" bottom mounting lip is to the floor. Cut to fit as tight as possible and the cut edge will fit underneath the column padding to protect the cut edge.

Below is a link to a video on cutting the mats. The cut edge should only go around a column or against the wall. Definitely a good idea to put wood trim along the top edge of the mats to protect the cut edge.

<https://fujimats.com/blogs/resources/how-to-cut-your-fuji-mats-1>

There is also a way to cut and wrap the edge of the cut side. This is not an easy process and takes a lot of time but it does help protect the cut edge a little better.

<https://fujimats.com/blogs/resources/edge-wrapping-a-fuji-mat>

Hope this helps. Let me know if you have any other questions.



Congratulations on your new FUJI Mats!! You've got something great going, here are some tips on getting them installed perfectly!




Mat Size: 1 x 2 meter (half mats: 1 x 1 meter)

1 m = 39.4" [appx 3'3"]

2 m = 78.8" [ appx 6'6"]

Chances are your room isn't square, so you may want to make adjustments at cut locations or add shims beneath your trim work or wall pads.

Choose your favorite Pattern, there's no wrong choice!

Brick Pattern:	Pinwheel Pattern:	Subway Tile Pattern:
		

1. Clean your space so it's dust free. Vacuum, wet-mop, and let dry.
2. Start in your most visible corner, lay mats snugly together and work your way out.
  - a. Tip: use a finished edge at the doorway / main entrance to your space.
3. Make your cuts last, as needed.

**Cuts:**

- a. Measure the space to fill for each mat, one at a time. Take a measurement on each end of the space to fill, it's likely going to be a slight angle cut.
- A. Mark your cut on the mat with a pencil, add 1/8" to 1/4" to the measurements to add some pressure to the layout.
- B. Cut using a large extendable knife and a straight edge. Make the first pass lightly to score a line. Use several light passes to cut through the mat. Bury the cut edge against the wall and the finished edge against the adjacent mats.

For rewrapping mats for a re-finished cut edge, see Wrapping Cut Edges Instructions on our website.


Retighten if needed, then secure in place with a framing kit or double sided tape on the perimeter row.



# Mat trim & re-wrap instructions:


[WWW.FUJIMATS.COM](http://WWW.FUJIMATS.COM)

1-800-663-0629



Snugly fit your FUJI Mats to your training area. Eliminate all gaps before measuring to cut the final mats to pressure-fit to your space.

*Note: Wrapping the edges is not typically necessary where the exposed edge butts into a wall pad or wall and is hidden from view and sweat/moisture. In cases where a surface cut or error is exposed, re-seal the surface with a dab of [VLP](#) or similar.*

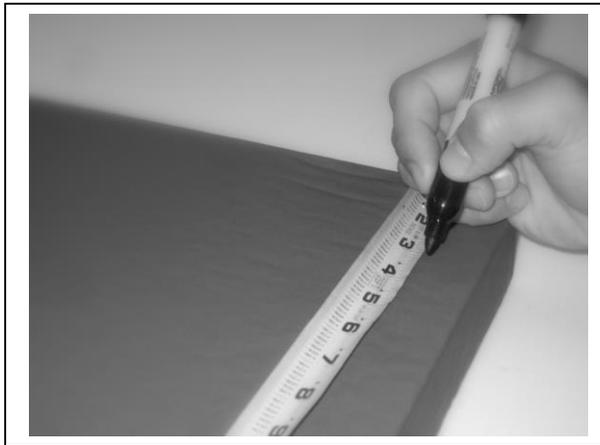

Mark the edge to be cut, ~4 inches longer than desired final length.

This will be Cut #1. It is only necessary to cut through the mat's vinyl surface.

Use a straight-edge or a T-Square to make Cut #1 with a utility knife.

[Note: you can also use a skill saw, table saw, or a jigsaw to make this cut. A extendable utility knife works great though!]




Next, mark the edges on the side of the mat with a pencil, 4 inches from your initial surface cut [Cut #1]. This mark is made exactly where you would like the new finished edge.



From the pencil mark, cut the side of the mat cut vertically towards the bottom. Depth isn't important, but get through the vinyl at least.

Cut from Cut #1 to the vertical cut you just made. This should be just a fraction of an inch down from the surface.

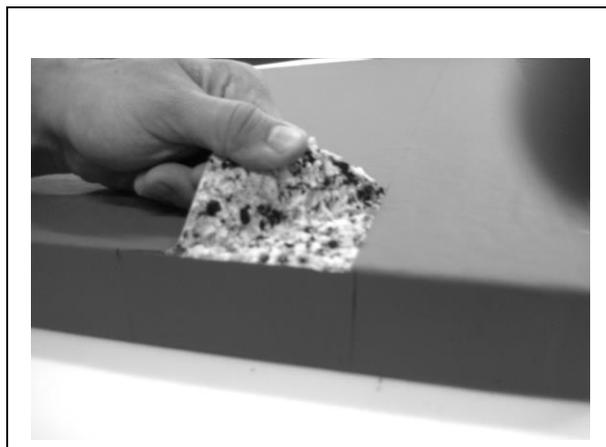

Pull back the vinyl from the foam.

You'll tear the vinyl from the foam from Cut #1 to the vertical cut. Keep this piece intact, and do not go too far with it. This is your re-wrap material.




Continue along the entire cut. Only pull back to where you need the end to be.

Have a friend hold back the flap (or tape it back) while you cut through the foam to remove the unwanted length.


\*Cut From the top so as to not puncture the vinyl surface.

Fold the excess over a table edge / 2x4 to help complete the cut.

Remove the excess and flip the mat over, face down.

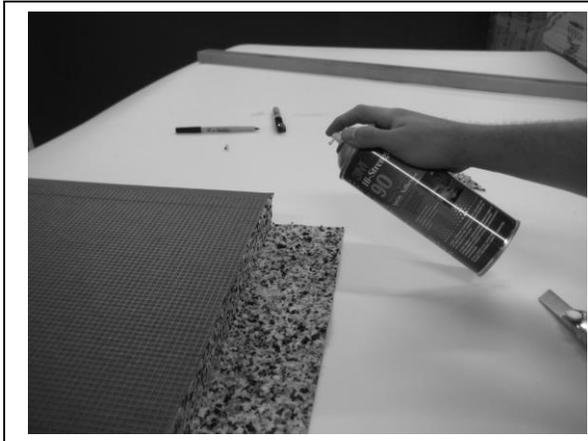

Use a foam/vinyl adhesive. [3M Super 77 can be found at Home Depot, Menards, etc] *follow the instructions on the can.* Spray both the flap and the bottom will meet. Allow t o get tacky.

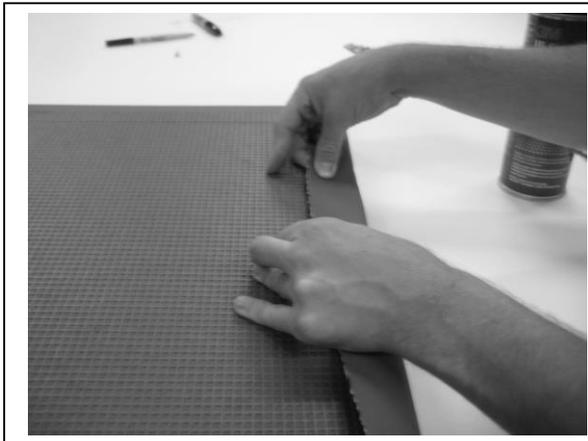

Press firmly and let the bond set and dry.

You're ready to put the FUJI mat into place!

Train Hard!

