

FINISH SCHEDULE								
TYPE	SYMBOL	MANUFACTURER	DESCRIPTION	MOUNTING	LAMPS	VOLTS	WATTS	REMARKS
A	A	STRIP SS32-UNV-EB81	4' WIDE COMMERCIAL FLUORESCENT STRIPLITE	SURFACE MOUNTED	2 LAMPS T8	277	56	PROVIDE & INSTALL BY LANDLORD
A1	A1	TEXAS FLUORESCENT FLUORESCENT FHB SERIES FHL3328W10MV	8' F-HI BAY LINEAR FLUOR. HI-BAY STRIP	CHAIN HUNG 2-PER LIGHT	6 LAMPS	277	68	PROVIDE & INSTALL BY LANDLORD SEE ELECTRIC PLANS FOR WIRING
A1.1	A1.1	TEXAS FLUORESCENT FLUORESCENT FHB SERIES FHL3328W10MV	4' F-HI BAY LINEAR FLUOR. HI-BAY STRIP	CHAIN HUNG 2-PER LIGHT	6 LAMPS	277	68	PROVIDE & INSTALL BY LANDLORD SEE ELECTRIC PLANS FOR WIRING
A2	A2	MERCURY LIGHTING MM232-8T-UNV	8' WIDE COMMERCIAL FLUOR. TANDEM STRIPLITE	CHAIN HUNG 2-PER LIGHT	4 LAMPS T8	277	112	PROVIDE & INSTALL BY LANDLORD SEE ELECTRIC PLANS FOR WIRING
B	B		FALSE SECURITY CAMERA & SIGN					PROVIDE & INSTALL BY FB. INSTALLED BY T.G.C. T.G.C. TO PROVIDE BATTERIES
E	SP		SPEAKER					PROVIDE & INSTALL BY FIVE BELOW
F		PATHWAY LIGHTING PEXUR-DL	UNIVERSAL EXIT LED RED	SURFACE MOUNTED	LED	277		PROVIDE & INSTALL BY LANDLORD
G		PATHWAY LIGHTING AR-2-DL	DUAL HEAD EMERGENCY W/ BATTERY PACK	CEILING MTD. (HUNG)	INCANDESCENT	277	5.4	PROVIDE & INSTALL BY LANDLORD
H		TEXAS FLUORESCENTS DCC150L-42W3424L-MV50K	FULL CUT-OFF WALL PACKS	SURFACE MOUNTED	32 CREE LED 42W	277	42	PROVIDE & INSTALL BY LANDLORD
J		PATHWAY EM LIGHTING 12DF3624HSB-WP/12C50	DOUBLE HEAD WEATHER PROOF REMOTE EMERGENCY LIGHT	SURFACE MOUNTED		12	24	PROVIDE & INSTALL BY LANDLORD
L		TEXAS FLUORESCENTS DCC150L-42W3424L-MV50K	FULL CUT-OFF WALL PACKS	SURFACE MOUNTED	32 CREE LED 42W	277	42	PROVIDE & INSTALL BY LANDLORD
M		TEXAS FLUORESCENTS 5M302	EXTERIOR SCONCE METAL HALIDE		LED	277	42	PROVIDE & INSTALL BY LANDLORD
N		SPC12 SPECTRUM CYLINDERS SPC1203LEDV-26W-50K-EX-200GV-SG-SO-WL-SM-GW	12" SHALLOW CYLINDER UNDER CANOPY LIGHTING	SURFACE MOUNTED	LED	277	26	PROVIDE & INSTALL BY LANDLORD


NOTE: FOR ALL LIGHTING FIXTURES CONTACT SPECIALTY LIGHTING GROUP, HEATHER KEEGAN (803)767-0110 EXT. 205 FOR CUT SHEETS.

NOTE: LIGHTS ARE 4-5 WEEKS OUT. PLACE ORDERS SO AS TO NOT DISRUPT THE SCHEDULE.

NOTE: ALL INDOOR FLUORESCENT FIXTURES WITH DOUBLE-END LAMPS THAT CONTAIN BALAST(S) ARE TO BE PROVIDED W/ DISCONNECTING MEANS WITH IN THE FIXTURE.

DOUBLE CHECK FIXTURES FOR DIFFERENCE IN SPECS BETWEEN EASTERN & MIDWEST STORES.

	FURNISH BY	INSTALL BY	REMARKS
	LANDLORD	TENANT	
1. WORK DESIGNATED BY L.L. IS LANDLORD RESPONSIBILITY			
2. WORK DESIGNATED BY T.G.C. IS TENANT GENERAL CONTRACTOR			
3. WORK DESIGNATED BY FB IS FIVE BELOW RESPONSIBILITY			
GENERAL			
DEMISING PARTITIONS (METAL STUDS/MASONRY)			
DEMISING PARTITIONS GYPSUM BOARD & PREP			
OTHER INTERIOR PARTITIONS & PREP			
FIREPROOFING			AS REQUIRED BY LOCAL CODES
INSULATION			AS REQUIRED BY LOCAL CODES
ASBESTOS REMOVAL			IF APPLICABLE
FLOOR LEVELING			
STOREFRONT GLASS & FRAMING			
METAL DOORS & FRAMES			
ALL DOOR HARDWARE			BEST 7-PIN CORES PER DOOR SCHEDULE
INTERIOR GRAPHICS & SIGNAGE			
STOREFRONT SIGNAGE			COORDINATE WITH TENANT SIGN VENDOR
ELECTRICAL SERVICE CONDUIT & WIRES TO SPACE			
GENERAL ELECTRICAL WIRING			
TELEPHONE CONDUIT TO SPACE			TELEPHONE CONDUIT TO HAVE 25 PAIR WIRE FROM LANDLORD RM. TO TENANT SPACE
TELEPHONE WIRING			
TELEPHONE TERMINATION			
MECHANICAL EQUIPMENT (UNITS)			
MECHANICAL SUPPLY & RETURN DUCTING			
MECHANICAL CONTROLS			
SPRINKLER MAIN TO SPACE			
SPRINKLER LINES & HEADS			
FIRE EXTINGUISHERS			
FIRE ALARM & EMERGENCY PAGING SYSTEM			
PLUMBING (WASTE, VENT & WATER) TO SPACE			
NEW PLUMBING LINES IN SPACE			
PLUMBING FIXTURES & ACCESSORIES			
MOP SINK			
ELECTRIC WATER COOLER			
ELECTRIC WIRING & RECEPTALS			
PAINT SALES AREA			
PAINT MANAGERS OFFICE, RESTROOMS, CORRIDOR, STOCKRM.			
CONCRETE FLOORING - SALES FLOOR			CONTACT FLOOR POLISHING VENDOR FOR ADDITIONAL DETAILS/ INFORMATION
FLOOR TRANSITIONS			
VINYL BASE			
PAINT DECK STEEL/ETC.			
WALL PAPER			
FRP PANELS			
CONCRETE FLOORING - STOCKROOM			CONTACT FLOOR POLISHING VENDOR FOR ADDITIONAL DETAILS/ INFORMATION
VCT FLOORING - MANAGERS OFFICE/ RESTROOMS			
AWNINGS, CANOPY			CANOPY BY "MAPES"
FLOOR FIXTURES			
MILLWORK			
SAFE			(BOLT IN)
LIGHT FIXTURES & LAMPS			SEE REFLECTED CEILING PLANS
EMERGENCY LIGHTS & EXIT SIGNS			SEE REFLECTED CEILING PLANS
SOUND SYSTEM			
SPEAKER WIRE			
STOCKROOM SHELVING			
EMPLOYEE BREAK TABLE/ SHELVING			
MANAGER DESK/ SHELVING			
FIXTURE ASSEMBLY			
STOCK SHELVING			
CORNER UNITS			
UNIT HEATERS			
SECURITY ALARM & WIRING			IF APPLICABLE
SECURITY MIRRORS & CAMERAS			
EQUIP.			

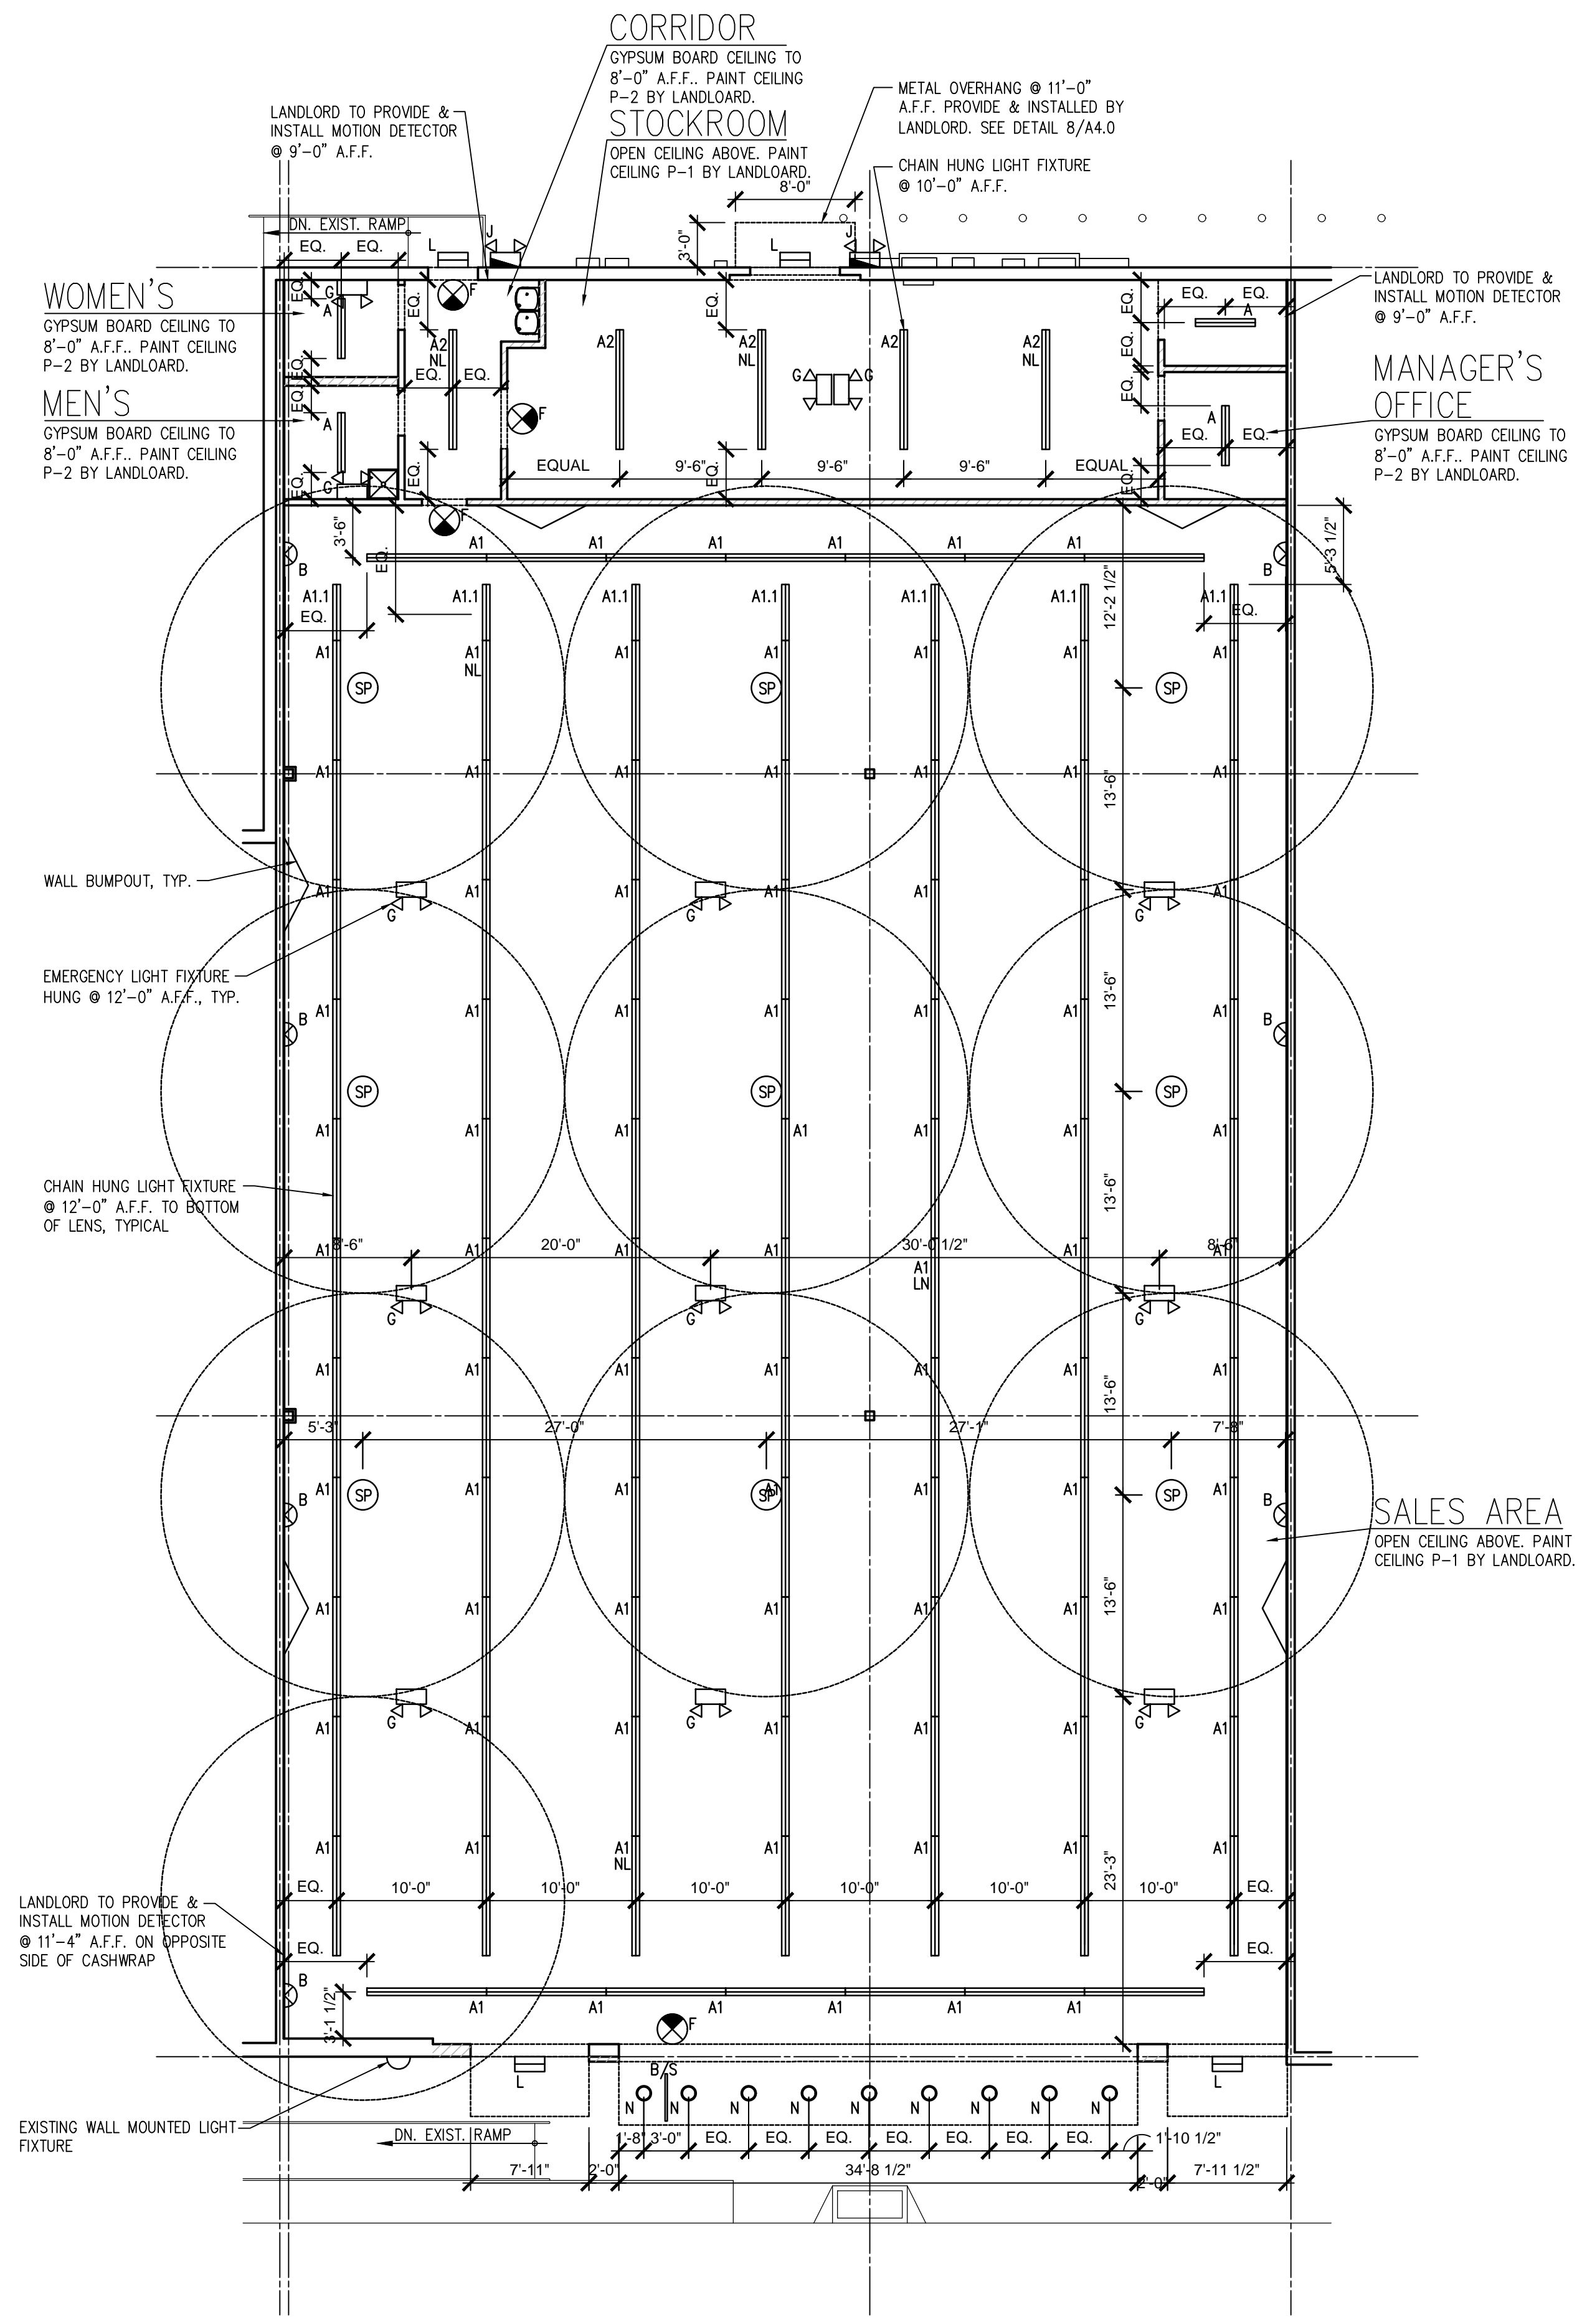

1 REFLECTED CEILING PLAN
1/8" = 1'-0"



112 NW 24th Street
Suite 116
Fort Worth, TX. 76164
phone. 682.365.2742
www.jrkd.com

Architect of Record:
Randy Kelly
randy.kelly@jrkd.com

FIVE BELOW

Revisions	City Comments
1	Date
2	Revision Date
3	Revision Date
4	Revision Date
5	Revision Date

FIVE BELOW
ALAMO RANCH MARKETPLACE
5511 N. W. LOOP 1604 N,
Suite 105
San Antonio, Texas 78253
06.14.2016
TX-16033
sheet

